

N° :

Date : 14 déc. 2017

Universal drive Unidrive M200-02400023

Utilisation : Variable speed drive (6 pulses) for Asynchronous motor ; Standard product Characteristics ; ; Heavy duty



Definition

Product range	Unidrive
Model	M200-024-00023A
Model	M200 (1 SI option - CodeSys) 6 pulses - internal choke (A)
Product cooling version	Air cooling (A)

Electrical characteristics

Overload	Heavy duty
----------	------------

Network side electrical characteristics

Power supply number of phases	3
Power supply voltage and frequency	380 to 480V ($\pm 10\%$) 45 to 66Hz
Power supply nominal current (A)	3.5

Motion side electrical characteristics

Continuous output current (A)	2.30	@ 3.00 kHz - 40°C
Output maximal current (A)	3.50	
Maximum overload duration from 100% Ico (s) / repetitivity (s)	8.00 / 600.00	
Maximum overload duration from cold (s) / repetitivity (s)	60.00 / 600.00	


characteristics

Size	02	Losses (W)	41
Dimensions (HxWxD)	180 x 75 x 150	acoustic noise (dB(A))	45
Weight (kg)	1.00	Maximal altitude (m)	1000
Protection indice	IP20	Maximal relative humidity (%)	95

N° :

Date : 14 déc. 2017

Variable speed drive (6 pulses) : Unidrive M200-02400023

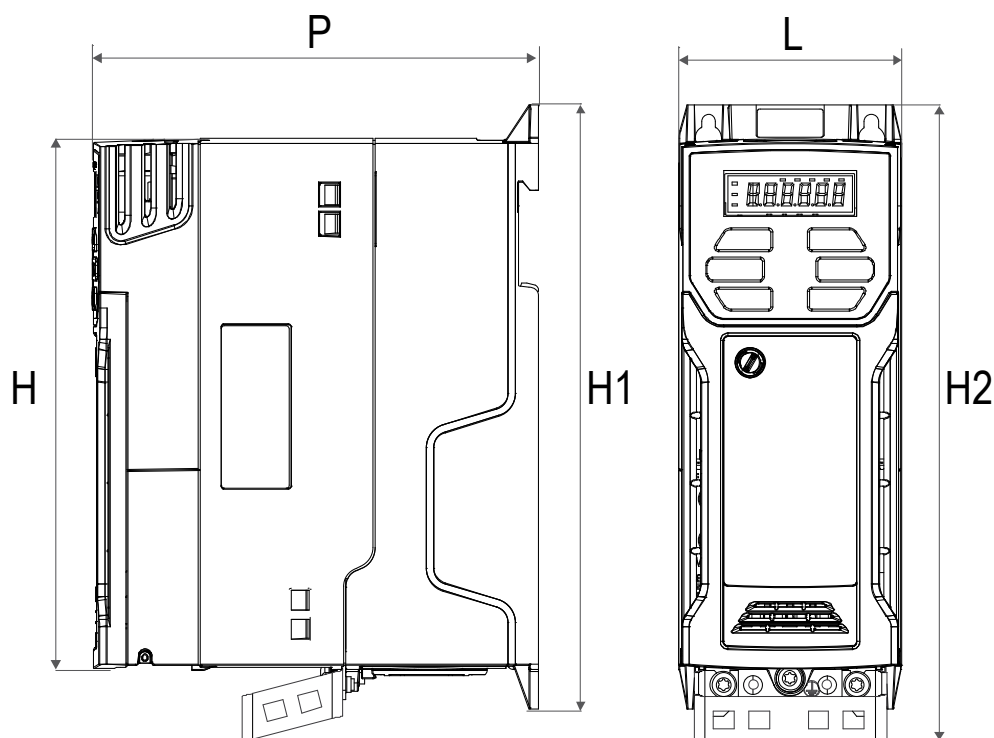

H (mm)	180
H1 (mm)	205
H2 (mm)	216

L (mm)	75
--------	----

P (mm)	150
P1 (mm)	0

Weight (kg)	1.00
Total weight (kg)	1.00