


Marking Tubes and Labels

MAX®

Electronic Lettering Machine

LETATWIN™

LM-390A/PC

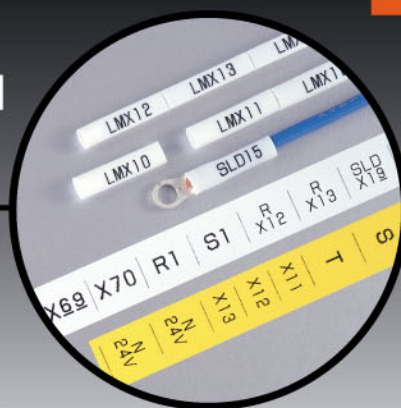

Included
PC EDITOR



New Model

**Professional choice
for your marking job!**

The class's fastest marking job!
High volume memory!
USB makes PC access easier!

Comes with plastic carry case



DEVELOPED FOR HEAVY USERS

High-speed marking

LM-390A/PC has an enhanced feeding system that provides you with marking speed at 35mm/second. LM-390A/PC can make approx 50pcs of 20mm-length tube per minute.




Maximum 100,000 characters built-in large memory storage

	LM-380A	LM-390A/PC
Maximum characters	40,000	100,000
Characters per file	2,000	5,000 per file, up to 50 files

Easy access from your PC with USB

LM-390A/PC features USB port for direct connection with Windows personal computer, as well as USB memory slot for off-the-line data exchange with Windows personal computer by "LETATWIN PC EDITOR".

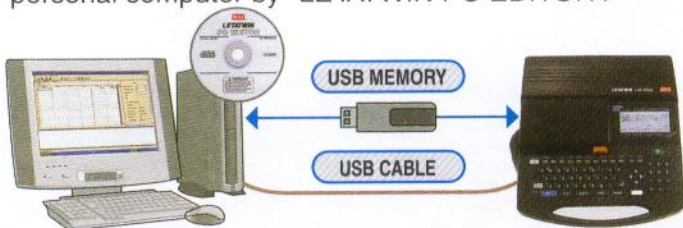

Cutting Depth Adjustment

You can adjust the half cutting depth with the "Half cutting depth adjustment lever", when half cutting is too deep.



SPECIFICATIONS

ITEMS	CONTENTS
Name	MAX ELECTRONIC LETTERING MACHINE LM-390A/PC
Dimensions	275(W)×300(D)×91(H) mm
Weight	2.3kg
Printing method	Thermal transfer method (300dpi)
Display	LCD dot matrix : 64×160 Pixel (Backlit)
Printing speed	35mm/s (Standard) 20mm/s (Low temperature mode)
Maximum Printing length	Tube : 20m, Tape : 5m
Maximum number of characters to input	5,000 characters per file
Character size	2,3,4,6mm height
Usable tube	φ 2.5mm~6.5mm (PVC tube, Shrinkable tube)
Usable tape	Width 5,9,12mm (Max genuine tape)
Tube cutting method	Auto half cut, manual full cut
Internal memory	100,000 characters (Maximum 50 files)
External memory	USB memory
Interface	USB 2.0 full speed
Power supply	DC12V, 3.3A Use only specified AC Adapter (100V~240V) included in the package
Power consumption	Max 16W
Operating environment	10°C to 35°C

Large and backlit LCD display


Backlit LCD display makes your confirmation of input contents easy, even if you work in dim jobsite.



The pitch can be set up to maximum 60mm

Marking on tape : 4 up to 60mm

Marking on tube : 10 up to 60mm *(Auto pitch function is available for more than 60mm)*



Marking Materials

φ2.5mm~φ6.5mm PVC tubes and Heat-shrinkable tube are applicable. MAX genuine tapes of 5mm, 9mm and 12mm width are available.



Economical refill-type ink ribbon.



CONSUMABLES

INK RIBBON CASE LM-RC310 10PCS/BOX

ECONOMICAL INK RIBBON
LM-IR300B (BLACK) 50m/ROLL 5 ROLLS/BOX

INK RIBBON FOR HEAT SHRINKABLE TUBE
LM-IR300BP (BLACK) 50m/ROLL 5 ROLLS/BOX
LM-IR300W (WHITE) 32m/ROLL 5 ROLLS/BOX

UL STANDARD COMPLIANT TUBE

LM-TU332N2 WHITE	φ 3.2mm×100m/ROLL	1 ROLL/BOX
LM-TU336N2 WHITE	φ 3.6mm×100m/ROLL	1 ROLL/BOX
LM-TU342N2 WHITE	φ 4.2mm×80m/ROLL	1 ROLL/BOX
LM-TU352N2 WHITE	φ 5.2mm×80m/ROLL	1 ROLL/BOX

MAX HIGH QUALITY TUBE

LM-TU432L WHITE	φ 3.2mm×200m/ROLL	1 ROLL/BOX
LM-TU436L WHITE	φ 3.6mm×200m/ROLL	1 ROLL/BOX
LM-TU442L WHITE	φ 4.2mm×200m/ROLL	1 ROLL/BOX
LM-TU452L WHITE	φ 5.2mm×135m/ROLL	1 ROLL/BOX
LM-TU464L WHITE	φ 6.4mm×100m/ROLL	1 ROLL/BOX

TAPE CASSETTE

LM-TP305Y (YELLOW)	5mm(W)×8m(L)/PC	10PCS/BOX
LM-TP305W (WHITE)	5mm(W)×8m(L)/PC	10PCS/BOX
LM-TP305T (TRANSPARENT)	5mm(W)×8m(L)/PC	10PCS/BOX
LM-TP309Y (YELLOW)	9mm(W)×8m(L)/PC	10PCS/BOX
LM-TP309W (WHITE)	9mm(W)×8m(L)/PC	10PCS/BOX
LM-TP309T (TRANSPARENT)	9mm(W)×8m(L)/PC	10PCS/BOX
LM-TP312Y (YELLOW)	12mm(W)×8m(L)/PC	10PCS/BOX
LM-TP312W (WHITE)	12mm(W)×8m(L)/PC	10PCS/BOX

The specifications and design of the products in this catalogue will be subject to change without advance notice due to our continuous efforts to improve the quality of our products.

Thiết Bị Điện Công Nghiệp & Dân Dụng

32 Đường 35, kp.2, p.Linh Đông, q.Thủ Đức, tp.HCM

Tel: 08 3720 2968 - Fax: 08 3720 2974 - Email: sales@thegioidien.com