


Jainson Polyamide Flexible Conduit Gland

A common product family for flexible conduit connection, cable protection and organized panel wiring. Available in eight Pipe OD variants from 6.5 mm to 36 mm, with size-specific thread and body dimensions.

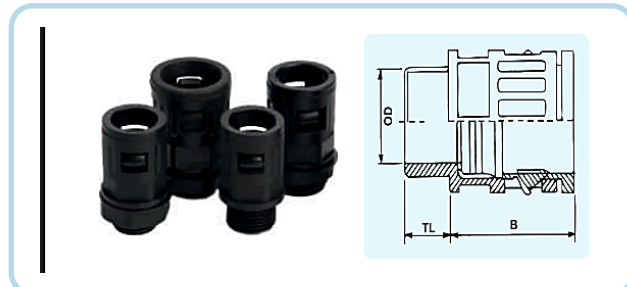

MATERIAL
Polyamide PA-6 V-2

TEMPERATURE
-40 C to +105 C

SHORT TERM
150 C

COLOUR
Black

MODEL / SIZE SELECTION

CAT NO. BLACK	AD SIZE (mm)	THREAD OD (mm)	PIPE OD (mm)	THREAD LENGTH (mm)	B (mm)
JCG - 7	10	12.3	6.5	11	18.7
JCG - 9	13	15	10	11	21.7
JCG - 11	15.8	18.4	12.5	11	26
JCG - 13.5	18.4	20.2	14.3	11	28
JCG - 16	21.2	22.3	17.0	13	32
JCG - 21	28.5	28	23	16	39.5
JCG - 29	34.5	36.7	29	16	46.5
JCG - 36	42.5	46.7	36	16	55.5

DIMENSION REFERENCE

OD = Pipe outside diameter
 TL = Thread length
 B = Overall body dimension
 AD = Gland body / entry size
 Thread OD varies by model

TYPICAL APPLICATIONS

- Electrical control panels
- PLC & automation panels
- Machine wiring
- Flexible conduit routing
- Industrial cable protection

SELECTION NOTE

Select the gland by Pipe OD and verify the matching AD size, thread OD, thread length and B dimension from the table before ordering.